




15 KV EPOXY INSULATORS



IN1041

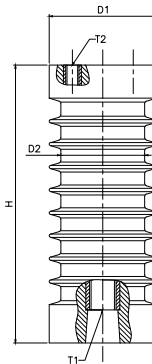

IN1007, IN1008



IN1024

DIMENSIONAL DATA

ITEM NAME	ITEM CODE	D1	D2	H	INSERT		INSERT		INSERT	
					T1	L1	T2	L2	T3	L3
SIGB 20	IN1007	82	63	175	M20	52	M10	22	M10	22
SIGB 21	IN1008	75	52	175						
INSULATOR 132X175	IN1024	130	90	175	M20	35	M16	35	M16	35
INSULATOR 165 HT - TAPERED	IN1041	94	73	165	M20	35	M16	35	M16	35
INSULATOR 125X170	IN1071	125	95	170	M20	39	M16	35	-	-
INSULATOR 56X175	IN1113	55	38	175	M10	16	M10	16	-	-

MECHANICAL CHARACTERISTICS

ITEM NAME	ITEM CODE	CREEPAGE	LOAD DISTANCE FROM THE FACE	CANTILIVER BREAKING LOAD	TENSILE WITHSTAND LOAD	COMPRESSION WITHSTAND LOAD
SIGB 20	IN1007	248	40	> 1000	> 2000	> 11000
SIGB 21	IN1008	248	40	> 1000	> 2000	> 11000
INSULATOR 132X175	IN1024	370	40	> 1600	> 2000	> 11000
INSULATOR 75/85X145	IN1041	250	40	> 1000	> 2000	> 10000
INSULATOR 125X170	IN1071	260	40	> 1000	> 2000	> 10000
INSULATOR 56X175	IN1113	238	40	> 300	> 2000	> 10000

ELECTRICAL CHARACTERISTICS

DRY POWER FREQUENCY WITHSTAND VOLTAGE	38 KV FOR 1 MINUTE
DRY FLASH OVER	> 70 KV
IMPULSE WITHSTAND VOLTAGE	105 KVP